




# AM-17H LCD Monitor

## FEATURES

- High resolution
- Multi video standard (NTSC / PAL / Auto)
- Multi-language support
- Provide DC12V output (for PVM)
- Fast response time
- High contrast at 500:1
- Key lock function
- Scale mode (Full / under / over / 4:3 / 16:9)
- Auto power on: AV1 / AV2 / S-Video / VGA selectable
- Optional: rack mount type
- 3D Comb Filter / 3D De-interlace
- PIP Function

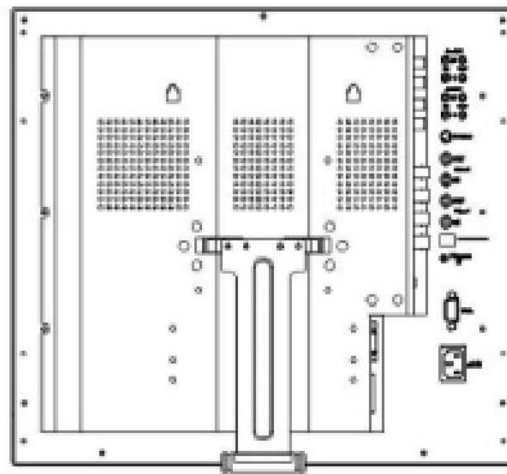

**AM - 17H**

<b>Front Control</b>	Auto, Menu, Up/Down, Source, Power
<b>Display Resolution (Dot)</b>	640 x 480 @ 60/72/75 800 x 600 @ 56/60/72/75 1024 x 768 @ 60/70/75 1280 x 1024 @60/75
<b>Active Area (mm)</b>	337.92(H) x 270.336(V)
<b>Dot Pitch (mm)</b>	0.264 x 0.264 mm
<b>LCD Profil Ratio</b>	5:4
<b>Display Color</b>	16.2M
<b>Brightness (Central)</b>	300cd/m <sup>2</sup> (*1)
<b>Contrast Ratio</b>	500 :1 Typ
<b>Viewing Angle</b>	Left 70° / Right 70° / Up 67° / Down 63° CR>5
<b>Response Time</b>	8ms
<b>Input Voltage</b>	96-256Vac, 60Hz / 50Hz
<b>Input Signal</b>	1 Vp-p composite video
<b>Input Impedance</b>	75 ohm
<b>Output Impedance</b>	75 ohm ( Auto Termination)
<b>Operating System</b>	NTSC: 525 lines, 60 fields/sec.; PAL:625 lines, 50 fields/sec
<b>CONNECTION</b>	
<b>VGA Input</b>	15 pin D-SUB connector
<b>Video Input/Output</b>	BNC x 2 / BNC x 2 Looping Output Auto Termination
<b>Audio Input/Output (LR)</b>	RCA Jack x 2 / RCA Jack x 2
<b>S-Video</b>	4-pin DIN connector x 1
<b>Speaker</b>	2W + 2W
<b>Power Consumption</b>	40W
<b>Weight</b>	N.W./G.W: 5.6kg / 7.5 kg
<b>Dimension</b>	390 (W) x 74.2 (D) x 354.5 (H) mm
<b>Operation Temperature</b>	- 10 to 50 °C (14 to 122 °F)
<b>Storage Temperature</b>	- 20 to 60 °C (- 4 to 140 °F)
<b>Certificate</b>	CUL, UL, BSMI, CE, FCC