




AM-19H LCD Monitor

FEATURES

- High resolution
- Multi video standard (NTSC / PAL / Auto)
- Multi-language support
- Provide DC12V output (for PVM)
- Fast response time
- High contrast at 500:1
- Key lock function
- Scale mode (Full / under / over / 4:3 / 16:9)
- Auto power on: AV1 / AV2 / S-Video / VGA selectable
- Optional: rack mount type
- 3D Comb Filter / 3D De-interlace
- PIP Function

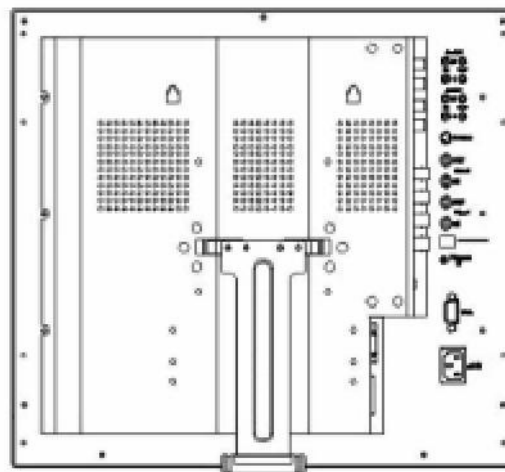

AM - 19H

Front Control	Auto, Menu, Up/Down, Source, Power
Display Resolution (Dot)	640 x 480 @ 60/72/75 800 x 600 @ 56/60/72/75 1024 x 768 @ 60/70/75 1280 x 1024 @60/75
Active Area (mm)	376.43(H) x 301.056(V)
Dot Pitch (mm)	0.294 x 0.294 mm
LCD Profil Ratio	5:4
Display Color	16.2M
Brightness (Central)	270cd/m ² (*1)
Contrast Ratio	700 :1 Typ
Viewing Angle	Left 80° / Right 80° / Up 75° / Down 60° CR>10
Response Time	8ms
Input Voltage	96-256Vac, 60Hz / 50Hz
Input Signal	1 Vp-p composite video
Input Impedance	75 ohm
Output Impedance	75 ohm (Auto Termination)
Operating System	NTSC: 525 lines, 60 fields/sec.; PAL:625 lines, 50 fields/sec
CONNECTION	
VGA Input	15 pin D-SUB connector
Video Input/Output	BNC x 2 / BNC x 2 Looping Output Auto Termination
Audio Input/Output (LR)	RCA Jack x 2 / RCA Jack x 2
S-Video	4-pin DIN connector x 1
Speaker	2W + 2W
Power Consumption	45W
Weight	N.W./G.W: 6.5kg / 8.3 kg
Dimension	425 (W) x 75.6 (D) x 396 (H) mm
Operation Temperature	- 10 to 50 °C (14 to 122 °F)
Storage Temperature	- 20 to 60 °C (- 4 to 140 °F)
Certificate	CUL, UL, BSMI, CE, FCC