



XMD

Differential Pressure Transmitter For Process Industry With HART®-Communication

accuracy according to IEC 60770:
0.1 % FSO



Differential Pressure Transmitter

XMD

Nominal pressure

from 75 mbar
up to 2 bar

Output signals

2-wire: 4 ... 20 mA
others on request

Special characteristics

- ▶ static over pressure 130 bar
- ▶ turn-down 10:1
- ▶ two chamber aluminium die cast case
- ▶ HART®-communication
- ▶ output signal: linear or square root extraction
- ▶ IS-version
- ▶ Ex ia = intrinsically safe version

Optional versions

- ▶ IS-version
- ▶ Ex d = flameproof enclosure
- ▶ with integrated display and operating module
- ▶ prepared for chemical seals assembly



The differential pressure transmitter XMD has been especially designed for the process industry and can be used for level measurement of closed, pressurized tanks, pump or filter controlling, etc.

Another attribute is the possibility to switch the output signal from linear to square root extraction by what the flow rate of the medium can be issued.

Preferred areas of use are



Oil and gas industry



Chemical and petrochemical industry



Energy Industry



Food Industry



Paper Industry



XMD

Differential Pressure Transmitter

Technical Data

Pressure ranges			
Nominal pressure [mbar]	75	400	2000
Permissible static pressure [bar]	130	130	130
Output signal / Supply			
Standard	2-Leiter: 4 ... 20 mA with HART [®] -communication: $V_s = (12 \text{ V} + 20 \text{ mA} \times R_{\min}) \dots 28 \text{ V}$		
Performance			
Clacking error	$\leq \pm 0.2 \%$ FSO		
Accuracy ¹	turn-down $\leq 5:1$: $\leq \pm 0.1 \%$ FSO turn-down $> 5:1$: $\leq \pm [0.1 + 0.015 \times \text{turn-down}] \%$ FSO with turn-down = nominal pressure range / adjusted range		
Permissible load	load during HART [®] -communication: $R_{\min} = 250 \Omega$		
Supply	$\leq 0.05 \%$ FSO / 10 V		
Permissible load	$\leq 0.05 \%$ FSO / k Ω		
Long term stability	$\leq \pm (0.1 \times \text{turn-down}) \%$ FSO / year at reference conditions		
Response time	300 msec – with electronic damping 0 sec		
Measuring rate	3.5/sec		
Adjustability	electronic damping: 0 ... 100 sec offset: 0 ... 90 % FSO turn-down of span: max. 10:1		
¹ accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)			
Thermal effects (Offset and Span) / Permissible temperatures			
Thermal error	$\leq \pm (0.1 \times \text{turn-down}) \%$ FSO / 10 K in compensated range standard: -20 ... 80 °C optional for device without display: -40 ... 60 °C		
Permissible temperatures	without display: medium: -40 ... 85 °C	environment: -40 ... 50 °C	storage: -40 ... 80 °C
	with display: medium: -40 ... 85 °C	environment: -20 ... 50 °C	storage: -30 ... 80 °C
Electrical protection			
Short-circuit protection	permanent		
Reverse polarity protection	no damage, but also no function		
Electromagnetic compatibility	emission and immunity according to EN 61326		
Mechanical stability			
Vibration	5 g RMS (25 ... 2000 Hz)	according to DIN EN 60068-2-6	
Shock	100 g / 1 msec	according to DIN EN 60068-2-27	
Materials			
Pressure port	stainless steel 1.4401 (316)		
Housing	Aluminium die cast, powder-coated		
Viewing glass	laminated safety glass		
Seals (media wetted)	FKM / EPDM		
Diaphragm	stainless steel 1.4435 (316 L)		
Media wetted parts	pressure port, seals, diaphragm		
Filling fluids	silicon oil		
Explosion protection			
Intrinsically safe version	zone 0/1: II 1/2 G Ex ia IIC T4		
Flameproof enclosure	zone 1: II 2 G Ex d IIC T5		
Permissible temperatures for environment	intrinsically safe version: -20 ... 65 °C flameproof enclosure: -20 ... 80 °C		
Safety technical maximum values for intrinsically safe version	$U_i = 28 \text{ V}$, $I_i = 93 \text{ mA}$, $P_i = 660 \text{ mW}$; $C_i = 26.4 \text{ nF}$; $L_i = 0$		
Miscellaneous			
Display (optionally)	LC display, visible range 32.5 x 22.5 mm; 5-digit 7-segment main display, digit height 8 mm, range of indication ± 9999 ; 8-digit 14-segment additional display, digit height 5 mm; 52-segment bargraph; accuracy $0.1\% \pm 1$ digit		
Ingress protection	IP 67		
Installation position	any		
Weight	min. 3500 g		
Current consumption	approx. 21 mA		
Operational life	$> 100 \times 10^6$ cycles		
CE-conformity	EMC Directive: 2004/108/EC		



XMD


Differential Pressure Transmitter

Technical Data

Connections

Electrical connection	terminal clamps in clamping chamber with cable gland M20x1.5 (for cable-Ø 5 up to 14 mm)
Process connections	internal thread 1/4" - 18 NPT


Wiring diagram

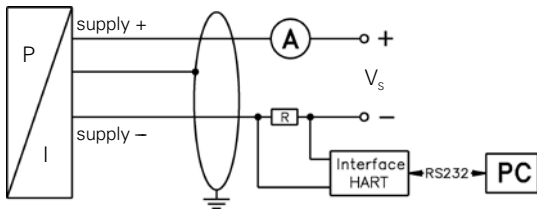

Pin configuration

Electrical connection	terminal clamps (clamp section 2.5 mm ²)
Supply +	2
Supply -	4
Test	3
Shield	1

Dimensions (in mm)²

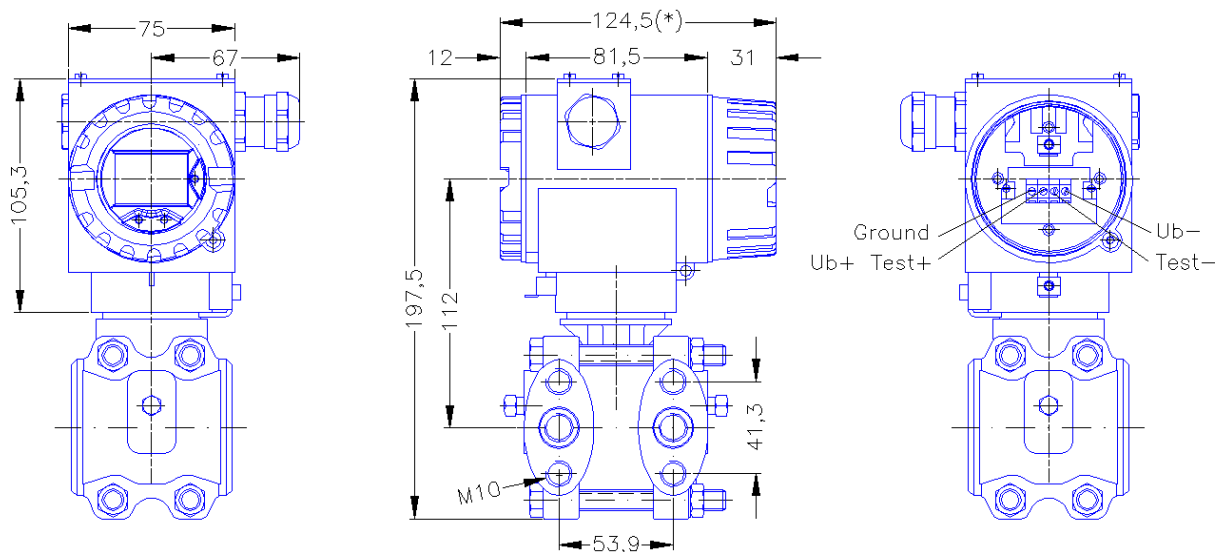

* without display and operating module marked dimensions decrease by 19 mm

² aluminium die cast case is horizontally rotatable as standard

HART[®] is a registered trade mark of HART Communication Foundation; Hastelloy[®] is a brand name of Haynes International Inc. Windows[®] is a registered trade mark of Microsoft Corporation



XMD

Differential Pressure Transmitter

Technical Data

Pressure Transmitter for Process Industry

XMP ci



Characteristics

- ▶ pressure ranges from 0.06 up to 20 bar
- ▶ turn-down 1:10
- ▶ two chamber aluminium die cast case or stainless steel field housing
- ▶ internal or flush mounted capacitive ceramic sensor
- ▶ HART[®]-communication (standard)
- ▶ IS-version (standard): Ex ia = intrinsically safe version
- ▶ accuracy according to IEC 60770: 0.2 % FSO



XMP i



Characteristics

- ▶ pressure ranges for vacuum, gauge and absolute pressure from 0.40 up to 600 bar
- ▶ turn-down 1:10
- ▶ two chamber aluminium die cast case or stainless steel field housing
- ▶ internal or flush welded diaphragm
- ▶ HART[®]-communication (standard)
- ▶ IS-version (standard): Ex ia = intrinsically safe version
- ▶ accuracy according to IEC 60770: 0.1 % FSO



Precision Pressure Transmitter for Food Industry, Pharmacy and Biotechnology

xlact ci



Characteristics

- ▶ pressure ranges from 60 mbar up to 20 bar
- ▶ turn-down 1:10
- ▶ hygienic version
- ▶ flush mounted, capacitive ceramic sensor
- ▶ several process connections (inch thread, Clamp, etc.)
- ▶ with integrated display and operating module
- ▶ accuracy according to IEC 60770: 0.2 % FSO



xlact i



Characteristics

- ▶ pressure ranges from 400 mbar up to 40 bar
- ▶ turn-down 1:10
- ▶ hygienic version
- ▶ flush welded diaphragm
- ▶ several process connections (G1" cone, Clamp, dairy pipe, etc.)
- ▶ with integrated display and operating module
- ▶ accuracy according to IEC 60770: 0.1 % FSO



This data sheet contains product specification; properties are not guaranteed. Subject to change without notice.

