

DS 5

Electronic OEM Pressure Switch Heavy Duty

Applications:

- ▶ mobile hydraulics
- ▶ presses
- ▶ oxygen application

Characteristics:

- ▶ stainless steel sensor, welded
- ▶ nominal pressure ranges from 0 ... 16 bar up to 0 ... 600 bar
- ▶ configurable via PC or programming device P6
- ▶ optionally: oil and grease free version



Technical Data




Input pressure range										
Nominal pressure gauge	[bar]	16	25	40	60	100	160	250	400	600
Overpressure (static)	[bar]	50	50	80	120	200	320	500	800	1200
Burst pressure \geq	[bar]	125	125	200	300	500	800	1250	2000	2000

Supply	
Supply voltage	$V_S = 12 \dots 30 V_{DC}$
Current consumption	max. 14 mA (without contacts)
Contacts	
Number	standard: 1 option: 2
Type	PNP
Switching performance	max. 300 mA, short-circuit proof
Accuracy of contacts	IEC 60770: $\leq \pm 1 \% FSO$
Repeatability	$\leq \pm 0.2 \% FSO$
Minimum hysteresis of contacts	$\leq \pm 0.5 \% FSO$
Status indication	SP 1: green SP 2: yellow
Switching function ¹	standard: n/o option: n/c
Switching mode ¹	standard: hysteresis mode option: window mode
Switch on point ¹	standard: factory setting 80 % FSO others: specify on order; adjustable range 5 ... 100 % FSO
Switch off point ¹	standard: factory setting 75 % FSO others: specify on order; adjustable range 5 ... 100 % FSO
Switch on / switch off delay ¹	standard: off others: specify on order, adjustable range from 10 msec up to 90 sec (step 10 msec)
Switching frequency	200 Hz (without switching delay)
Switching cycles	$> 100 \times 10^6$
¹ Parameters can be programmed by customer either with the programming kit CIS-G or with the programming device P6 (available as accessories).	
Thermal effects (Offset and Span) / Permissible temperatures	
Thermal error	$\leq \pm 0.2 \% FSO / 10 K$ in compensated range -20 ... 80 °C
Permissible temperatures	medium: -40 ... 125 °C electronics / environment / storage: -40 ... 85 °C

Electrical protection		
Short-circuit protection	permanent	
Reverse polarity protection	no damage, but also no function	
Electromagnetic compatibility	emission and immunity according to EN 61326	
Mechanical stability		
Vibration	10 g RMS (20 ... 2000 Hz)	according to DIN EN 60068-2-6
Shock	100 g / 11 msec	according to DIN EN 60068-2-27
Materials		
Pressure port	stainless steel 1.4404 (316L)	
Housing	stainless steel 1.4305 (303)	
Seal of pressure port	FKM	others on request
Seal of sensor	none (welded)	
Sensor	stainless steel 1.4548 (17-4PH)	
Media wetted parts	pressure port, seal, sensor	
Miscellaneous		
Option for mechanical connections 1/4" NPT, R 1/4" and 7/16"-20 UNF	oxygen application	
Weight	approx. 90 g	
Installation position	any	
Operational life	100 million load cycles	
Ingress protection	IP 67	
CE-conformity	EMC Directive: 2014/30/EU	Pressure Equipment Directive: 2014/68/EU (module A) ²

² This directive is only valid for devices with maximum permissible overpressure > 200 bar


Wiring diagrams

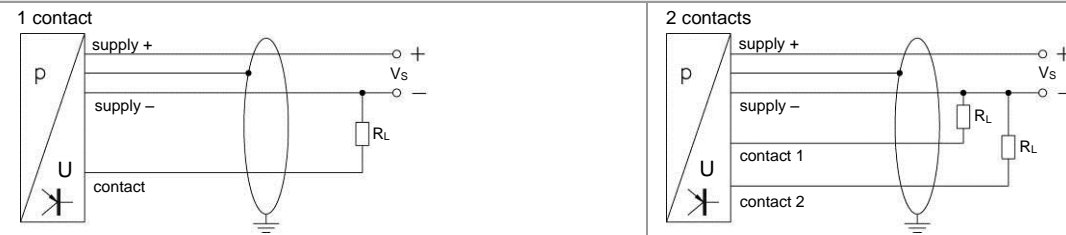

Pin configuration

Electrical connection	M12x1 (4-pin), metal	
Supply +	1	
Supply -	3	
Contact 1	4	
Contact 2	2	
Shield	plug housing	

Dimensions / Mechanical connections (mm / in)

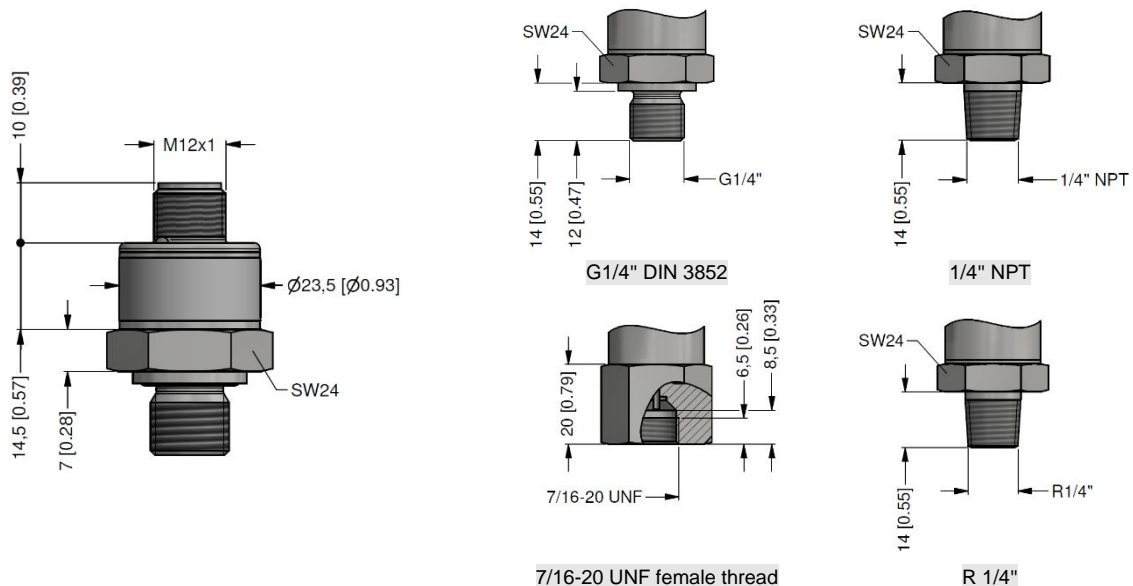

© 2021 BD|SENSORS GmbH – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

Ordering code DS 5

DS 5

<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	----------------------

Pressure	gauge	6	8	M													
Input	[bar]																
	16				1	6	0	2									
	25				2	5	0	2									
	40				4	0	0	2									
	60				6	0	0	2									
	100				1	0	0	3									
	160				1	6	0	3									
	250				2	5	0	3									
	400				4	0	0	3									
	600				6	0	0	3									
	customer				9	9	9	9									consult
Number of contacts	1 contact								1								
	2 contacts								2								
Electrical connection	M12x1 (4-pin), metal								M	1	3						
	customer								9	9	9						consult
Mechanical connection / Seal	G1/4" DIN 3852 /																
	on pressure port: FKM								3	0	0		P				
	1/4" NPT / without								N	4	0		2				
	R1/4" / without								R	4	0		2				
	7/16"-20 UNF female thread / without								S	0	1		2				
	customer								9	9	9		9				consult
Setting code	BD SENSORS standard ¹												0	0	0		
	setting according to customer ¹												9	9	9		consult
Special version	standard																
	oxygen application ²														0	0	7
	oil and grease free														0	0	8
	customer														9	9	9

¹ Parameters can be programmed by customer either with the programming kit CIS-G or with the programming device P6 (available as accessories).

² not possible with G1/4" DIN 3852

© 2021 BD|SENSORS GmbH - The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.