



LMK 387H

Stainless Steel Probe with HART®-communication

Ceramic Sensor

accuracy according to IEC 60770:
standard: 0.35 % FSO
option: 0.25 % FSO

Nominal pressure

from 0 ... 1 mH₂O up to 0 ... 100 mH₂O

Output signals

2-wire: 4 ... 20 mA
others on request

Special characteristics

- ▶ diameter 22 mm
- ▶ HART® communication
(setting of offset, span and damping)
- ▶ diaphragm ceramics 99,9% Al₂O₃
- ▶ good long-term stability
- ▶ especially for waste water

Optional versions

- ▶ IS-version
Ex ia = intrinsically safe for gas and dust
- ▶ temperature element Pt 100
- ▶ different kinds of elastomer

The stainless steel probe LMK 387H was developed for level and gauge measurement in wastewater, sludge or water courses. The mechanical robustness of the flush ceramic diaphragm facilitates an easy disassembly and cleaning of the probe in case of service.

The outer diameter is only 22 mm, whereby the installation or retrofitting can be easily carried out in 1 "pipes or in confined installation conditions. In addition to an intrinsically safe version (zone 0), a version with temperature signal is available.

Preferred areas of use



Water

groundwater and level monitoring



Sewage

waste water treatment
water recycling



Fuel and oil

tank battery
biogas plants



LMK 387H

Stainless Steel Probe

Technical Data

Input pressure range																									
Nominal pressure gauge	[bar]	0.1	0.16	0.25	0.4	0.6	1	1.6	2.5	4	6	10													
Level	[mH ₂ O]	1	1.6	2.5	4	6	10	16	25	40	60	100													
Overpressure	[bar]	3	4	5	5	7	7	12	20	20	20	20													
Burst pressure ≥	[bar]	4	6	8	8	9	9	18	25	25	30	30													
Permissible vacuum	[bar]	-0.2	-0.3			-0.5				-1															
Output signal / Supply																									
Standard	2-wire: 4 ... 20 mA / V _S = 12 ... 36 V _{DC} with HART® communication								V _S rated = 24 V _{DC}																
Option IS-version	2-wire: 4 ... 20 mA / V _S = 14 ... 28 V _{DC} with HART® communication								V _S rated = 24 V _{DC}																
Option Pt 100-temperature element																									
Temperature range	-25 ... 125 °C																								
Connectivity technology	3-wire			max. voltage 10 V _{DC} , in intrinsically safe circuit 30 V _{DC}																					
Resistance	100 Ω at 0 °C			max. current 2 mA, in intrinsically safe circuit 54 mA																					
Temperature coefficient	3850 ppm/K			max. power 10 mW, in intrinsically safe circuit 405 mW																					
Supply I _S	0.3 ... 1.0 mA _{DC}																								
Performance																									
Accuracy ¹	standard	P _N ≥ 160 mbar	TD ≤ 1:5	≤ ± 0.35 % FSO					TD _{max} = 1:10																
		TD > 1:5	≤ ± [0.35 + 0.05 x TD] % FSO																						
option	P _N < 160 mbar	TD ≤ 1:5	≤ ± [0.35 + 0.15 x TD] % FSO					TD _{max} = 1:3																	
		TD > 1:5	≤ ± [0.25 + 0.05 x TD] % FSO					TD _{max} = 1:10																	
	P _N < 160 mbar		≤ ± [0.25 + 0.15 x TD] % FSO					TD _{max} = 1:3																	
Permissible load	R _{max} = [(V _S - V _S min) / 0.02 A] Ω			load at HART®-communication: R _{min} = 250 Ω																					
Influence effects	supply: 0.05 % FSO / 10 V			load: 0.05 % FSO / kΩ																					
Long term stability	≤ ± (0.1 x turn-down) % FSO / year at reference conditions																								
Turn-on time	≤ 3 sec																								
Mean response time	≤ 50 msec without electronic damping																								
Measuring rate	≤ 20 Hz																								
Adjustability	configuration of following parameters possible (interface / software necessary ²): electronic damping: 0 ... 100 sec offset: 0 ... 80 % FSO turn down of span: max. 1:10																								
¹ accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)																									
² software, interface, and cable have to be ordered separately (software appropriate for Windows® 95, 98, 2000, NT Version 4.0 or higher, and XP)																									
Thermal effects (Offset and Span)																									
Tolerance band	≤ ± (0.5 x turn-down) % FSO																								
TC, average	± (0.05 x turn-down) % FSO / 10 K																								
in compensated range	-20 ... 80 °C																								
Permissible temperatures																									
Permissible temperatures	medium / electronics / environment / storage: -40 ... 85 °C																								
Electrical protection ³																									
Short-circuit protection	permanent																								
Reverse polarity protection	no damage, but also no function																								
Electromagnetic compatibility	emission and immunity according to EN 61326																								
³ additional external overvoltage protection unit in terminal box KL 1 or KL 2 with atmospheric pressure reference available on request																									
Electrical connection																									
Cable with sheath material ⁴	TPE-U	blue	Ø 7.4 mm																						
	TPE-U ⁵	red	Ø 9.0 mm	others on request																					
Bending radius	static installation: 10-fold cable diameter			dynamic application: 20-fold cable diameter																					
⁴ shielded cable with integrated ventilation tube for atmospheric pressure reference																									
⁵ only in combination with IS-version (explosion protection) and temperature element Pt100																									
Materials (media wetted)																									
Housing	stainless steel 1.4404 (316 L)																								
Seals (O-rings)	standard: FKM option: EPDM; FFKM (min. permissible temperature from -15 °C)			others on request																					
Diaphragm	ceramics Al ₂ O ₃ 99.9%																								
Protection cap	POM-C																								
Cable sheath	TPE-U																								
Explosion protection																									
Approval	IBExU 15 ATEX 1066 X / IECEx IBE 18.0019X																								
DX14B-LMK 387H	zone 0: II 1G Ex ia IIB T4 Ga zone 20: II 1D Ex ia IIIC T135 °C Da																								
Safety technical maximum values (pressure)	U _i = 28 V, I _i = 93 mA, P _i = 660 mW, C _i = 14 nF, L _i = 0 μH; the supply connections have an inner capacity of max. 27 nF opposite the enclosure																								
Safety technical maximum values (temperature)	U _i = 30 V, I _i = 54 mA, P _i = 405 mW, C _i = 0 nF, L _i = 0 μH (temperature element Pt 100)																								
Permissible temperatures for environment	in zone 0: -20 ... 60 °C with p _{atm} 0.8 bar up to 1.1 bar zone 1 and higher: -25 ... 65 °C																								
Connecting cables (by factory)	cable capacity: signal line/shield also signal line/signal line: 160 pF/m cable inductance: signal line/shield also signal line/signal line: 1 μH/m																								

LMK 387H

Stainless Steel Probe

Technical Data

Miscellaneous


Current consumption	max. 22 mA
Weight	approx. 280 g (without cable)
Ingress protection	IP 68
CE-conformity	EMC Directive: 2014/30/EU
ATEX Directive	2014/34/EU

Pin configuration


Electrical connection	cable colours (IEC 60757)	
	4 ... 20 mA / HART®	4 ... 20 mA / HART® (pressure) with Pt 100 (temperature)
Supply VS +	WH (white)	WH (white)
Supply VS -	BN (brown)	BN (brown)
Supply T+ (with Pt 100)	-	YE (yellow)
Supply T- (with Pt 100)	-	GY (grey)
Supply T- (with Pt 100)	-	PK (pink)
Shield	GNYE (green-yellow)	GNYE (green-yellow)

Wiring diagrams

2-wire-system current HART®

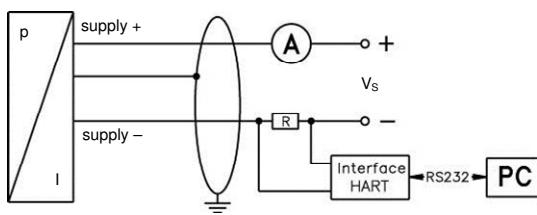


2-wire-system HART® (pressure) / 3-wire-system (temperature)

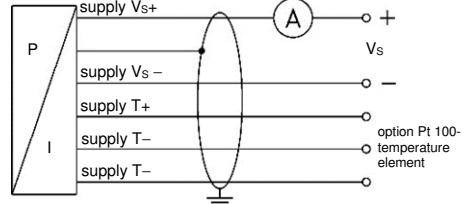


Dimensions (mm)

standard

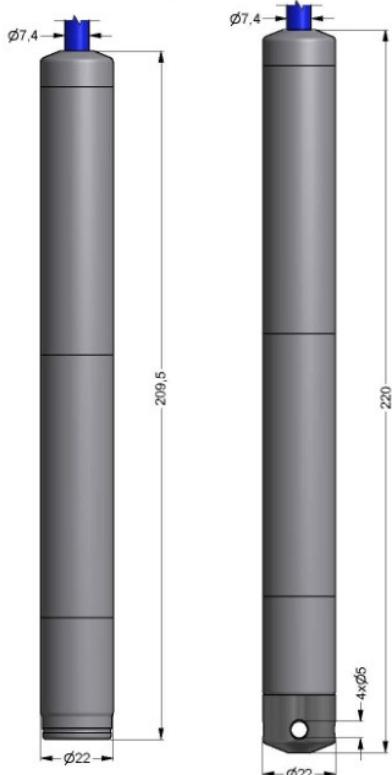


option

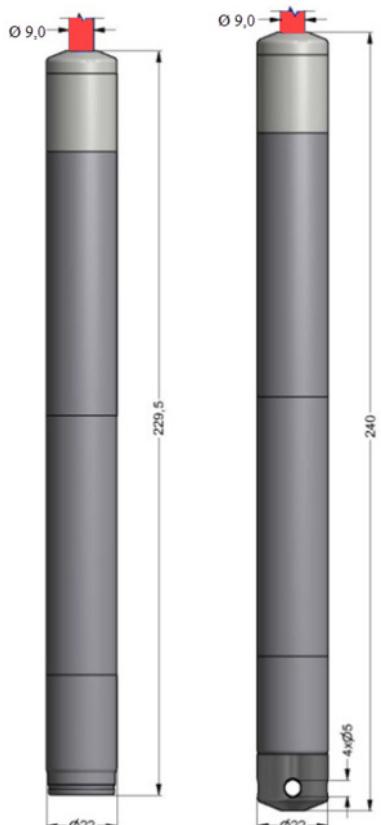

with Pt100 (temperature element)

Mounting flange with cable gland

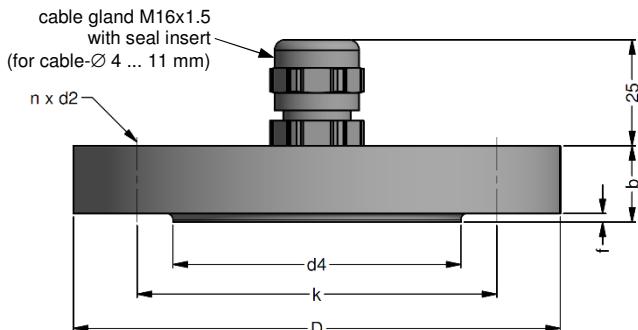

dimensions in mm			
size	DN25 / PN40	DN50 / PN40	DN80 / PN16
b	18	20	20
D	115	165	200
d2	14	18	18
d4	68	102	138
f	2	3	3
k	85	125	160
n	4	4	8

Technical data

Suitable for	all probes
Flange material	stainless steel 1.4404 (316L)
Material of cable gland	standard: brass, nickel plated on request: stainless steel 1.4305 (303); plastic
Seal insert	material: TPE (ingress protection IP 68)
Hole pattern	according to DIN 2507

Ordering type	Ordering code	Weight
DN25 / PN40 with cable gland brass, nickel plated	ZMF2540	1.4 kg
DN50 / PN40 with cable gland brass, nickel plated	ZMF5040	3.2 kg
DN80 / PN16 with cable gland brass, nickel plated	ZMF8016	4.8 kg

Terminal clamp



Technical data

Suitable for	all probes with cable Ø 5.5 ... 10.5 mm
Material of housing	standard: steel, zinc plated optionally: stainless steel 1.4301 (304)
Material of clamping jaws and positioning clips	PA (fibre-glass reinforced)
Dimensions (mm)	174 x 45 x 32
Hook diameter	20 mm

Ordering type	Ordering code	Weight
Terminal clamp, steel, zinc plated	Z100528	approx. 160 g
Terminal clamp, stainless steel 1.4301 (304)	Z100527	

Display program

- CIT 200** Process display with LED display
- CIT 250** Process display with LED display and contacts
- CIT 300** Process display with LED display, contacts and analogue output
- CIT 350** Process display with LED display, bargraph, contacts and analogue output
- CIT 400** Process display with LED display, contacts, analogue output and Ex-approval
- CIT 600** Multichannel process display with graphics-capable LC display
- CIT 650** Multichannel process display with graphics-capable LC display and datalogger
- CIT 700 / CIT 750** Multichannel process display with graphics-capable TFT monitor, touchscreen and contacts
- PA 440** Field display with 4-digit LC display

For further information please contact our sales department or visit our homepage:
<http://www.bdsensors.de>



Ordering code LMK 387H

LMK 387H													
Pressure													
gauge in bar		3	6	0									
gauge in mH ₂ O		3	6	1									
Input		[mH ₂ O]	[bar]										
1.0		0.10		1	0	0	0						
1.6		0.16		1	6	0	0						
2.5		0.25		2	5	0	0						
4.0		0.40		4	0	0	0						
6.0		0.60		6	0	0	0						
10		1.0		1	0	0	1						
16		1.6		1	6	0	1						
25		2.5		2	5	0	1						
40		4.0		4	0	0	1						
60		6.0		6	0	0	1						
100		10		1	0	0	2						
customer				9	9	9	9						consult
Housing													
stainless steel 1.4404 (316L)				1									
customer				9									consult
Diaphragm													
ceramics Al ₂ O ₃ 99.9 %				C									
customer				9									consult
Output													
HART®-communication 4 ... 20 mA / 2-wire				H									
HART®-communication intrinsic safety 4 ... 20 mA / 2-wire				I									
customer				9									consult
Seals													
FKM				1									
EPDM				3									
FFKM ¹				7									
customer				9									consult
Electrical connection													
TPE-U-cable (blue, Ø 7.4 mm) ²					4								
TPE-U-cable (red, Ø 9.0 mm) ^{2,3}					42								
customer					9								consult
Accuracy													
0.35 % FSO					3								
0.25 % FSO					2								
customer					9								consult
Cable length			in m										
standard					9	9	9						
with temperature element Pt 100					0	1	3						
customer					9	9	9						consult

¹ min. permissible temperature from -15 °C.

² shielded cable with integrated ventilation tube for atmospheric pressure reference

³ only in combination with Ex version (explosion protection) and temperature element Pt 100

HART® is a registered trade mark of HART Communication Foundation.