

# FlowSwitch 750E

## Dust monitoring for filter break

**NEW:** optional ATEX-Certification!





### Application

The dust indicator FS750E is for the use on the clean air side to detect dust behind a filter. In this way, filter cracks, fractures or assembly errors are reported automatically and reliably. With the latest ATEX certified explosion-proof option, the sensor of the FS750E is ready for use in explosive zone 20 Ex-areas.

### Scope of use

The FlowSwitch 750E can be put in metallic pipes and channels which shall be monitored on dust

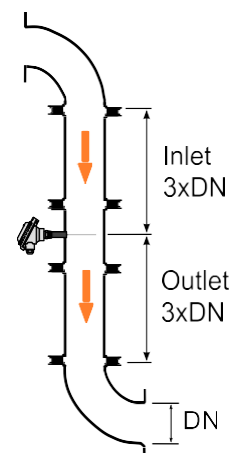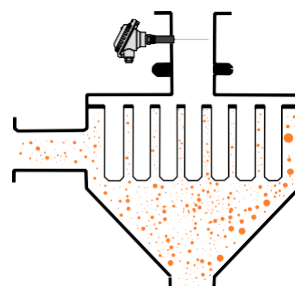

**HUMY 3000**  
Moisture  
measurement

**MF 3000**  
Mass flow  
measurement

**FS 510M**  
Microwave  
mass flow  
measurement

**FS 600E**  
Electrostatic  
mass flow  
monitoring

**FS 750E**  
Trieboelectric  
dust monitoring

**LC 510M**  
Limit level  
monitoring

## Main Benefits

- ◆ Automatic calibration
- ◆ Maintenance free
- ◆ Three-condition monitoring
- ◆ Analog output 4-20 mA
- ◆ Condition indication by different LED colors
- ◆ Compact form
- ◆ Protection class IP65
- ◆ Easy installation

## Function

The measurement system is based on the triboelectric effect: Particles collide permanently with each other or with other materials, e.g. the wall. Because of this process the particles will be charged in a natural way. If these electrically charged particles are flying next to the sensor rod of FS750E or even touch it, the particles are detected via the charge transfer. Resting particles, such as deposits etc., do not affect the measurement. Therefore a subsequent installation into existing exhaust ducts is possible without any problems.

Installation is quick and easy by welding a threaded socket. The sensor rod is inserted into the pipe and fixed by the thread. The sensor rod length should be at least 1/3 of the pipe diameter and must not touch the opposite side.

During operation, the emerging particle load is continuously gathered and classified in three different categories

	Particle load	Status	LED	Switch output 1	Switch output 2
<b>Load category I</b>	low	good condition	green	closed	closed
<b>Load category II</b>	medium	pre alarm	yellow	opened	closed
<b>Load category III</b>	high	main alarm	red	closed	opened

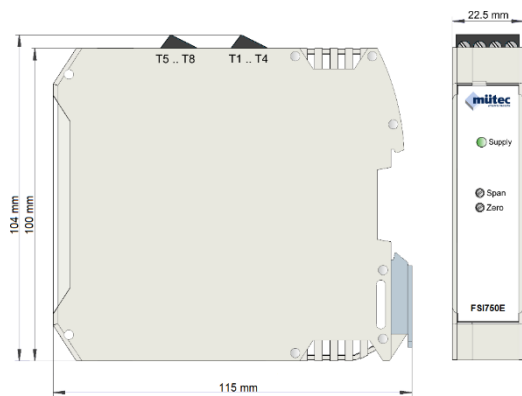


Figure 3: Dimensions of the transmitter

## Technical Data

Material	Housing Sensor rod (standard) Isolation (standard)	Aluminium Stainl. Steel 1.4571 PPS
Process cond.	Temperature (ATEX) Pressure	-20°C to +150°C (-10°C to +180°C) 0 to 2 bar
Power supply	Voltage Power consumption Power Storage EMC	24 VDC max. 50 mA < 2 W -20°C to +60°C According to EN 61326-1
Output	Switch1 and switch2 Switch output Switching voltage Switching current Switching capacity	Normally energized 60 VAC/DC Max. 100 mA 6 W
Calibration	Precalibration and automatical recalibration	
Certificates/ Directives	Protection Class EMC ATEX (optional)	IP 65 (EN 60529) According to EN 61326-1 II 1/2 D Ex ia ta/tb IIC T200°C Da/Db
Other	Ambient Temp. Storage Temp. Cable	-20°C to +50°C* -20°C to +70°C Assembled, 3m

\*if max. process temp is <90°C, max. amb. Temp. increases to 70°C

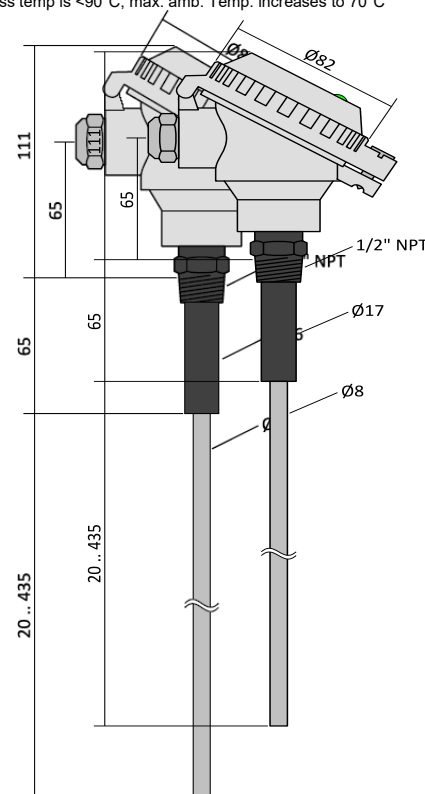


Figure 2: Dimensions of the sensor

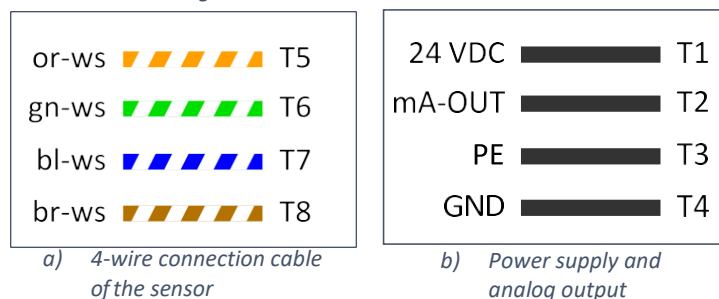


Figure 3: Terminal assignment