



DS 400

Intelligent Electronic Pressure Switch Stainless Steel

Stainless Steel Sensor

accuracy according to IEC 60770:
standard: 0.35 % FSO
option: 0.25 % FSO

Nominal pressure

from 0 ... 100 mbar up to 0 ... 600 bar

Contacts

1 or 2 independent PNP contacts,
freely configurable

Analogue output

2-wire: 4 ... 20 mA

3-wire: 4 ... 20 mA

3-wire: 0 ... 10 V (on request)

others on request

Special characteristics

- ▶ indication of measured values on a 4-digit LED display
- ▶ rotatable and configurable display module

Optional versions

- ▶ **IS-version**
Ex ia = intrinsically safe for gases and dust
- ▶ welded pressure sensor
- ▶ customer specific versions




The electronic pressure switch DS 400 is the successful combination of

- ▶ intelligent pressure switch
- ▶ digital display

and has been specially designed for numerous applications in various industrial sectors.

As standard the DS 400 offers a PNP contact and a display module, which is mounted rotatable in the globe housing. Additional optional versions like e.g. an intrinsically safe version, a second contact and an analogue output complete the profile.

Preferred areas of use are

-  Plant and machine engineering
-  Heating and air conditioning
-  Environmental engineering (water – sewage – recycling)



Input pressure range													
Nominal pressure gauge	[bar]	-1 ... 0	0.10	0.16	0.25	0.40	0.60	1	1.6	2.5	4	6	
Nominal pressure abs.	[bar]	-	-	-	-	0.40	0.60	1	1.6	2.5	4	6	
Overpressure	[bar]	5	0.5	1	1	2	5	5	10	10	20	40	
Burst pressure	[bar]	7.5	1.5	1.5	1.5	3	7.5	7.5	15	15	25	50	
Nominal pressure gauge / abs.	[bar]	10	16	25	40	60	100	160	250	400	600		
Overpressure	[bar]	40	80	80	105	210	210	600	1000	1000	1000		
Burst pressure	[bar]	50	120	120	210	420	420	1000	1250	1250	1250		
Vacuum resistance		p _N ≥ 1 bar: unlimited vacuum resistance						p _N < 1 bar: on request					
Contact ¹													
Number, type		standard: 1 PNP contact option: 2 independent PNP contacts											
Max. switching current		4 ... 20 mA / 2- and 3-wire: contact rating 125 mA, short-circuit resistant; V _{switch} = V _S - 2V 0 ... 10 V / 3-wire (on request): contact rating 125 mA, short-circuit resistant											
Accuracy of contacts ²		≤ ± 0.25 % FSO											
Repeatability		≤ ± 0.1 % FSO											
Switching frequency		2-wire: max. 10 Hz / 3-wire: 50 Hz											
Switching cycles		> 100 x 10 ⁶											
Delay time		0 ... 100 sec											
¹ with IS-protection max. 1 contact possible													
Analogue output (optionally) / Supply													
2-wire current signal		4 ... 20 mA / V _S = 13 ... 36 V _{DC} permissible load: R _{max} = [(V _S - V _{S min}) / 0.02 A] Ω response time: < 10 msec											
2-wire current signal with IS-protection		4 ... 20 mA / V _S = 15 ... 28 V _{DC} permissible load: R _{max} = [(V _S - V _{S min}) / 0.02 A] Ω response time: < 10 msec											
3-wire current signal		4 ... 20 mA / V _S = 24 V _{DC} ± 10 % adjustable (turn-down of span 1:5) ³ permissible load: R _{max} = 500 Ω response time: < 30 msec											
3-wire voltage signal (on request)		0 ... 10 V / V _S = 24 V _{DC} ± 10 % adjustable (turn-down of span 1:5) ³ permissible load: R _{min} = 10 kΩ response time: < 30 msec											
Without analogue output		V _S = 15 ... 36 V _{DC}											
Accuracy ²		standard: nominal pressure < 0.4 bar: ≤ ± 0.5 % FSO nominal pressure ≥ 0.4 bar: ≤ ± 0.35 % FSO option: nominal pressure ≥ 0.4 bar: ≤ ± 0.25 % FSO											
² accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability) ³ with turn-down of span the analogue signal is adjusted automatically to the new measuring range													
Thermal effects (Offset and Span)													
Nominal pressure p _N	[bar]	-1 ... 0			< 0.40			≥ 0.40					
Tolerance band	[% FSO]	≤ ± 0.75			≤ ± 1			≤ ± 0.75					
in compensated range	[°C]	-20 ... 85			0 ... 70			-20 ... 85					
Permissible temperatures													
Permissible temperatures		medium: -40 ... 125 °C			electronics / environment: -40 ... 85 °C			storage: -40 ... 100 °C					
Electrical protection													
Short-circuit protection		permanent											
Reverse polarity protection		no damage, but also no function											
Electromagnetic compatibility		emission and immunity according to EN 61326											
Mechanical stability													
Vibration		10 g RMS (25 ... 2000 Hz)					according to DIN EN 60068-2-6						
Shock		500 g / 1 msec					according to DIN EN 60068-2-27						
Materials													
Pressure port		stainless steel 1.4404 (316L)											
Housing		stainless steel 1.4404 (316L)											
Viewing glass		laminated safety glass											
Seals (media wetted)		standard: FKM option: welded version ⁴ on request others on request											
Diaphragm		stainless steel 1.4435 (316 L)											
Media wetted parts		pressure port, seals, diaphragm											
⁴ welded version only for pressure ports according to EN 837; possible for nominal pressure ranges p _N ≤ 40 bar													
Explosion protection (only for 4 ... 20 mA / 2-wire)													
Approval AX14-DS 400		IBExU 06 ATEX 1050 X zone 0: II 1G Ex ia IIC T4 Ga (connector) / II 1G Ex ia IIB T4 Ga (cable) zone 20: II 1D Ex ia IIIC T135 °C Da											
Safety techn. maximum values		U _i = 28 V, I _i = 93 mA, P _i = 660 mW, C _i ≈ 0 pF, L _i ≈ 0 μH											
Max. switching current ⁵		70 mA											
Permissible temperatures for environment		in zone 0: -20 ... 60 °C with p _{atm} 0.8 bar up to 1.1 bar in zone 1 or higher: -25 ... 70 °C											
Connecting cables (by factory)		cable capacitance: signal line/shield also signal line/signal line: 100 pF/m cable inductance: signal line/shield also signal line/signal line: 1 μH/m											
⁵ the real switching current in the application depends on the power supply unit													


Miscellaneous	
Display	4-digit, 7-segment-LED display visible range 37.2 x 11 mm digit height 10 mm range of indication -1999 ... +9999 accuracy 0.1 % ± 1 digit digital damping 0.3 ... 30 sec (programmable) measured value update 0.0 ... 10 sec (programmable)
Current consumption (without contacts)	2-wire signal output current: max. 25 mA 3-wire signal output current: approx. 30 mA + signal current 3-wire signal output voltage: approx. 30 mA
Ingress protection	IP 67
Installation position	any 6
Weight	approx. 400 g
Operational life	100 million load cycles
CE-conformity	EMC Directive: 2014/30/EU Pressure Equipment Directive: 2014/68/EU (module A) ⁷
ATEX Directive	2014/34/EU

⁶ Pressure switches are calibrated in a vertical position with the pressure connection down. If this position is changed on installation there can be slight deviation in the zero point for pressure ranges $p_N \leq 1$ bar.


⁷ This directive is only valid for devices with maximum permissible overpressure > 200 bar.

Wiring diagrams

2-wire-system (current)

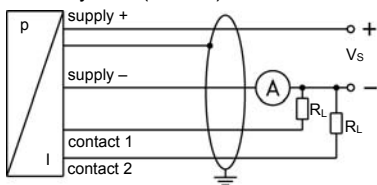


3-wire-system (current / voltage)

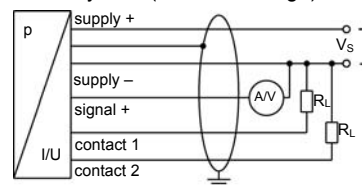

Pin configuration


Electrical connection	M12x1 metal (5-pin)
Supply +	1
Supply -	3
Signal + (only 3-wire)	2
Contact 1	4
Contact 2	5
Shield	plug housing / pressure port

Electrical connection (dimensions in mm)




M12x1 (5-pin)

Designs ⁸



side display



45° display (on request)

⁸ all designs in horizontal rotatable housing as standard


DS 400

Electronic Pressure Switch

Technical Data







Mechanical connections (dimensions in mm)

standard

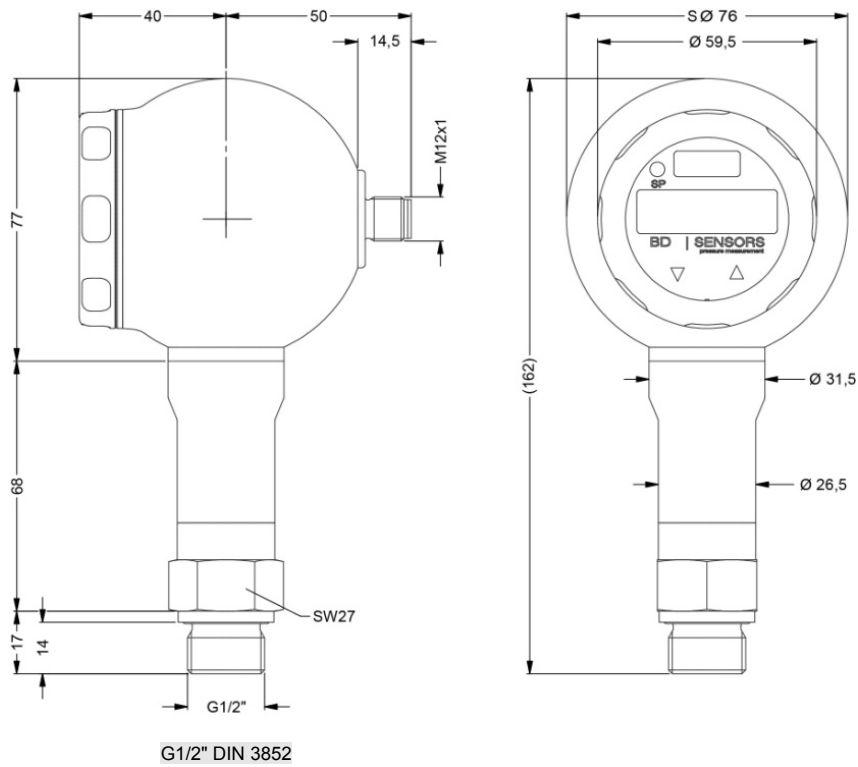

⇒ for nominal pressure $p_N > 400$ bar increases the length of devices without IS-version by 19 mm and of devices with IS-version by 39 mm

options

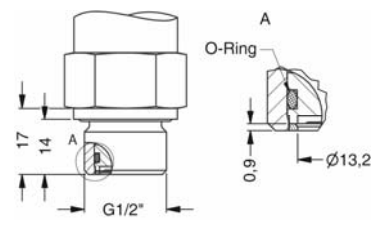

⇒ metric threads and other versions on request

© 2020 BD|SENSORS GmbH – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

Ordering code DS 400

DS 400

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Pressure																				
gauge ¹		7	A	0																
absolute ²		7	A	1																
Input																				
[bar]																				
0.10 ²		1	0	0	0															
0.16 ²		1	6	0	0															
0.25 ²		2	5	0	0															
0.40		4	0	0	0															
0.60		6	0	0	0															
1.0		1	0	0	1															
1.6		1	6	0	1															
2.5		2	5	0	1															
4.0		4	0	0	1															
6.0		6	0	0	1															
10		1	0	0	2															
16		1	6	0	2															
25		2	5	0	2															
40		4	0	0	2															
60		6	0	0	2															
100		1	0	0	3															
160		1	6	0	3															
250		2	5	0	3															
400		4	0	0	3															
600		6	0	0	3															
-1 ... 0		X	1	0	2															
customer		9	9	9	9															consult
Design																				
stainless steel globe housing (side display)						K	H													
stainless steel globe housing (45° display)						K	4													consult
Analogue output																				
without								0												
4 ... 20 mA / 2-wire								1												
0 ... 10 V / 3-wire, adjustable								3J												consult
4 ... 20 mA / 3-wire, adjustable								7J												
intrinsic safety 4 ... 20 mA / 2-wire ³								E												
customer								9												consult
Contact																				
1 contact									1											
2 contacts ³									2											
Accuracy																				
standard for p _N ≥ 0.4 bar	0.35 %								3											
standard for p _N < 0.4 bar	0.5 %								5											
option for p _N ≥ 0.4 bar	0.25 %								2											
customer									9											consult
Electrical connection																				
male plug M12x1 (5-pin) / metal version										N	1	1								
customer										9	9	9								consult
Mechanical connection																				
G1/2" DIN 3852										1	0	0								
G1/2" EN 837										2	0	0								
G1/4" DIN 3852										3	0	0								
G1/4" EN 837										4	0	0								
G1/2" DIN 3852 with flush sensor ⁴										F	0	0								
1/2" NPT										N	0	0								
1/4" NPT										N	4	0								
customer										9	9	9								consult
Seals																				
FKM													1							
without (welded version) ⁵													2							consult
customer													9							consult
Special version																				
standard																		0	0	0
customer																		9	9	9
																				consult

¹ from 60 bar: measurement starts with ambient pressure
² absolute pressure possible from 0.4 bar
³ with IS version max. 1 contact is possible
⁴ only possible for nominal pressure ranges p_N ≤ 40 bar
⁵ welded version only with pressure ports according to EN 837; possible for nominal pressure ranges p_N ≤ 40 bar

© 2020 BD/SENSORS GmbH - The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

