



DMK 331

Industrial Pressure Transmitter

Ceramic Sensor

accuracy according to IEC 60770:
0.5 % FSO

Nominal pressure

from 0 ... 400 mbar up to 0 ... 600 bar

Output signals

2-wire: 4 ... 20 mA

3-wire: 0 ... 20 mA / 0 ... 10 V

others on request

Special characteristics

- ▶ pressure port G 1/2" flush for pasty and polluted media
- ▶ pressure port G 1/2" open port PVDF for aggressive media
- ▶ oxygen application





Optional versions

- ▶ IS-version
Ex ia = intrinsically safe for gases and dusts
- ▶ SIL 2
according to IEC 61508 / IEC 61511
- ▶ customer specific versions

The industrial pressure transmitter DMK 331 with ceramic sensor has been especially designed for pasty, polluted or aggressive media and for oxygen applications at low pressure range.

As with all industrial pressure transmitters made by BD|SENSORS, you may choose between various electrical and mechanical connections also on DMK 331.

Preferred areas of use are

-  Plant and Machine Engineering
-  Energy Industry
-  Environmental Engineering
(water - sewage - recycling)
-  Medical Technology



Input pressure range ¹																			
Nominal pressure gauge	[bar]	-1...0	0.4	0.6	1	1,6	2,5	4	6	10	16	25	40	60	100	160	250	400	600 ²
Nominal pressure abs.	[bar]	-	-	0.6	1	1,6	2,5	4	6	10	16	25	40	60	100	160	250	400	600 ²
Overpressure	[bar]	4	1	2	2	4	4	10	10	20	40	40	100	100	200	400	400	600	800
Burst pressure ≥	[bar]	7	2	4	4	5	7,5	12	18	30	50	75	120	180	300	500	750	1000	1100
Vacuum resistance		P _N ≥ 1 bar: unlimited vacuum resistance											P _N < 1 bar: on request						
¹ PVDF pressure port possible for nominal pressure ranges up to 60 bar																			
² nominal pressure 600 bar without UL certification																			
Output signal / Supply																			
Standard		2-wire: 4 ... 20 mA / V _S = 8 ... 32 V _{DC}																	
Option IS-protection		2-wire: 4 ... 20 mA / V _S = 10 ... 28 V _{DC}																	
Options 3-wire		3-wire: 0 ... 20 mA / V _S = 14 ... 30 V _{DC} 0 ... 10 V / V _S = 14 ... 30 V _{DC}																	
Performance																			
Accuracy ³		≤ ± 0.5 % FSO																	
Permissible load		current 2-wire: R _{max} = [(V _S - V _{S min}) / 0.02 A] Ω											current 3-wire: R _{max} = 500 Ω						
		voltage 3-wire: R _{min} = 10 kΩ																	
Influence effects		supply: 0.05 % FSO / 10 V											load: 0.05 % FSO / kΩ						
Long term stability		≤ ± 0.3 % FSO / year at reference conditions																	
Response time		2-wire: ≤ 10 msec											3-wire: ≤ 3 msec						
³ accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)																			
Thermal effects (Offset and Span) / Permissible Temperatures																			
Thermal error		≤ ± 0.2 % FSO / 10 K																	
in compensated range		-25 ... 85 °C																	
Permissible temperatures ⁴		medium: -40 ... 125 °C					electronics / environment: -40 ... 85 °C							storage: -40 ... 100 °C					
⁴ for pressure port of PVDF the minimum temperature is -30 °C																			
Electrical protection																			
Short-circuit protection		permanent																	
Reverse polarity protection		no damage, but also no function																	
Electromagnetic compatibility		emission and immunity according to EN 61326																	
Mechanical stability																			
Vibration		10 g RMS (25 ... 2000 Hz)					according to DIN EN 60068-2-6												
Shock		500 g / 1 msec					according to DIN EN 60068-2-27												
Materials																			
Pressure port		standard: stainless steel 1.4404 (316 L) optional for G1/2" open port with nominal pressure range up to 60 bar: PVDF others on request																	
Housing		stainless steel 1.4404 (316L)																	
Option compact field housing		stainless steel 1.4305 (303) with cable gland brass, nickel plated													others on request				
Seals (media wetted)		standard: FKM							options: EPDM (for P _N ≤ 160 bar),						others on request				
Diaphragm		ceramic Al ₂ O ₃ 96 %																	
Media wetted parts		pressure port, seals, diaphragm																	
Explosion protection (only for 4 ... 20 mA / 2-wire)																			
Approval		IBExU 10 ATEX 1068 X / IECEx IBE 12.0027X																	
DX19-DMK 331		stainless steel pressure port: zone 0: II 1G Ex ia IIC T4 Ga zone 20: II 1D Ex ia IIIC T 85°C Da plastic pressure port: zone 1: II 2G Ex ia IIC T4 Gb zone 21: II 2D Ex ia IIIC T 85°C Db																	
Safety technical maximum values		U _I = 28 V _{DC} , I _I = 93 mA, P _I = 660 mW, C _I ≈ 0 nF, L _I ≈ 0 μH, the supply connections have an inner capacity of max. 27 nF to the housing																	
Permissible temperatures for environment		in zone 0: -20 ... 60 °C with p _{atm} 0.8 bar up to 1.1 bar in zone 1 or higher: -20 ... 70 °C																	
Connecting cables (by factory)		cable capacitance: signal line/shield also signal line/signal line: 160 pF/m cable inductance: signal line/shield also signal line/signal line: 1μH/m																	
Miscellaneous																			
Option SIL ⁵ 2		according to IEC 61508 / IEC 61511																	
Option oxygen application		for P _N ≤ 15 bar: O-ring in 70 EPDM 281 (with BAM-approval); permissible maximum values are 15 bar / 60° C and 10 bar / 90° C for P _N ≤ 25 bar: O-ring in FKM Vi 567 (with BAM-approval); permissible maximum values are 25 bar / 150° C																	
Current consumption		signal output current: max. 25 mA											signal output voltage: max. 7 mA						
Weight		approx. 140 g																	
Installation position		any																	
Operational life		> 100 x 10 ⁶ pressure cycles																	
CE-conformity		EMC Directive: 2004/108/EC											Pressure Equipment Directive: 97/23/EC (module A) ⁶						
ATEX Directive		94/9/EG																	
⁵ only for 4 ... 20 mA / 2-wire																			
⁶ This directive is only valid for devices with maximum permissible overpressure > 200 bar																			


DMK 331

Industrial Pressure Transmitter


Technical Data

Wiring diagrams

2-wire-system (current)

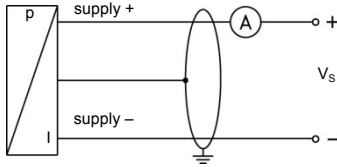

3-wire-system (current / voltage)


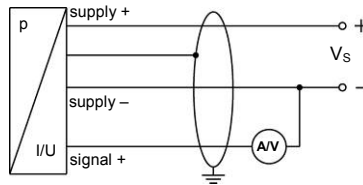


Pin configuration

Electrical connection	ISO 4400	Binder 723 (5-pin)	M12x1 / metal (4-pin)	field housing	cable colours (DIN 47100)
Supply +	1	3	1	IN +	wh (white)
Supply -	2	4	2	IN -	bn (brown)
Signal + (only for 3-wire)	3	1	3	OUT+	gn (green)
Shield	ground pin	5	4	⊥	ye/gn (yellow / green)



Electrical connections (dimensions in mm)

standard





ISO 4400 (IP 65)



option




Binder Series 723 5-pin (IP 67)




M12x1 4-pin (IP 67)



cable outlet with PVC cable (IP 67)⁷

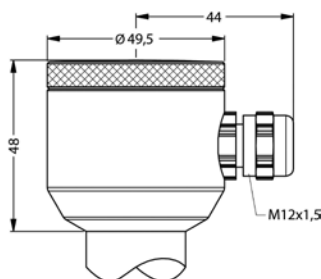

compact field housing (IP 67)

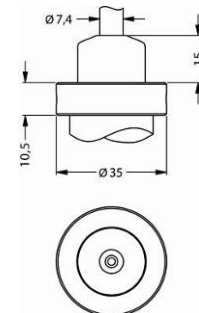

cable outlet, cable with ventilation tube (IP 68)⁸


⇒ universal field housing stainless steel 1.4404 (316 L) with cable gland M20x1.5 (ordering code 880) and other versions on request

⁷ standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70°C)

⁸ different cable types and lengths available, permissible temperature depends on kind of cable


Mechanical connection (dimensions in mm)

standard

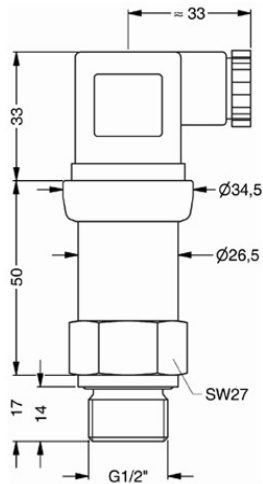


G1/2" DIN 3852 with ISO 4400

standard for SIL- and SIL-IS-version

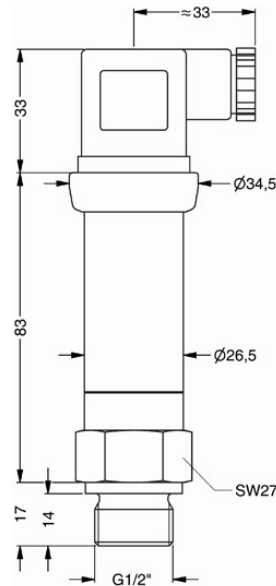


G1/2" DIN 3852 with ISO 4400


option




G1/2" EN 837




G1/2" open port

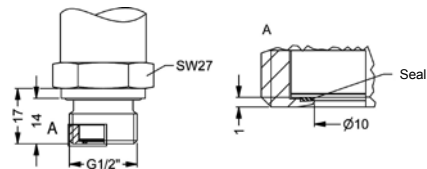


G1/2" semi-flush DIN 3852; M20x1.5⁹




G1/4" DIN 3852



G1/4" EN 837



1/2" NPT



1/4" NPT

⇒ metric threads and other versions on request

⁹ possible for nominal pressure ranges $P_N \leq 25$ bar; absolute pressure ranges on request

Ordering code DMK 331

DMK 331



Pressure										
	gauge	2	5	0						
	absolute	2	5	1						
Input [bar]										
	0.40		4	0	0	0				
	0.60		6	0	0	0				
	1.0		1	0	0	1				
	1.6		1	6	0	1				
	2.5		2	5	0	1				
	4.0		4	0	0	1				
	6.0		6	0	0	1				
	10		1	0	0	2				
	16		1	6	0	2				
	25		2	5	0	2				
	40		4	0	0	2				
	60		6	0	0	2				
	100		1	0	0	3				
	160		1	6	0	3				
	250		2	5	0	3				
	400		4	0	0	3				
	600		6	0	0	3				
	-1 ... 0		X	1	0	2				
	customer		9	9	9	9				consult
Output										
	4 ... 20 mA / 2-wire					1				
	0 ... 20 mA / 3-wire					2				
	0 ... 10 V / 3-wire					3				
	Intrinsic safety 4 ... 20 mA / 2-wire					E				
	SIL2 4 ... 20 mA / 2-wire					1S				
	SIL2 with Intrinsic safety					ES				
	4 ... 20 mA / 2-wire									
	customer					9				consult
Accuracy										
	0.5 %					5				
	customer					9				consult
Electrical connection										
	Male and female plug ISO 4400					1	0	0		
	Male plug Binder series 723 (5-pin)					2	0	0		
	Cable outlet with PVC cable ¹					T	A	0		
	Cable outlet with cable					T	R	0		
	Male plug M12x1 (4-pin) / metal					M	1	0		
	compact field housing									
	stainless steel 1.4305 (303)					8	5	0		
	customer					9	9	9		consult
Mechanical connection ²										
	G1/2" DIN 3852					1	0	0		
	G1/2" EN 837					2	0	0		
	G1/4" DIN 3852					3	0	0		
	G1/4" EN 837					4	0	0		
	G1/2" DIN 3852 with ³									
	semi-flush sensor					F	0	0		
	G1/2" DIN 3852 open pressure port					H	0	0		
	1/2" NPT					N	0	0		
	1/4" NPT					N	4	0		
	customer					9	9	9		consult
Seals										
	FKM							1		
	EPDM ⁴							3		
	customer							9		consult
Pressure port										
	Stainless steel 1.4404 (316L)							1		
	PVDF ⁵							B		
	customer							9		consult
Diaphragm										
	Ceramics Al ₂ O ₃ 96%								2	
	customer								9	consult
Special version										
	standard							0	0	0
	oxygen application ⁶							0	0	7
	customer							9	9	9

Prices EXW Thierstein, excluding package

- ¹ standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70°C)
- ² metric threads and others on request
- ³ possible for nominal pressure ranges $P_N \leq 25$ bar; absolute pressure ranges on request
- ⁴ possible for nominal pressure range $P_N \leq 160$ bar
- ⁵ PVDF only with G1/2" DIN 3852 open pressure port (up to 60 bar), minimum permissible temperature is -30 °C
- ⁶ oxygen application with FKM-seal up to 25 bar and with EPDM-seal up to 15 bar possible

04.03.2015

This document contains product specification, properties are not guaranteed. Detailed information about options are defined in the datasheet. Subject to change without notice.