



# DMP 321

## Industrial Pressure Transmitter

### Stainless Steel Sensor

accuracy according to IEC 60770:  
standard: 0.25 % FSO  
option: 0.1 % FSO

#### Nominal pressure

from 0 ... 100 mbar up to 0 ... 600 bar

#### Output signals

2-wire: 4 ... 20 mA  
3-wire: 0 ... 20 mA / 0 ... 10 V  
others on request

#### Special characteristics

- ▶ perfect thermal behaviour
- ▶ excellent long-term stability
- ▶ compact design

#### Optional versions





- ▶ IS-version  
Ex ia = intrinsically safe for gases and dusts
- ▶ pressure sensor welded
- ▶ customer specific versions

The pressure transmitter DMP 321 is the consistent further development of our in many applications approved DMP 331. It shows an improved signal behavior and sets new standards in the industrial class.

Its metallic diaphragm made of stainless steel (1.4435 / 316L) offers a good corrosion resistance in many industrial processes.

The modular device concept allows to combine different pressure ranges with a variety of electrical and mechanical connections. Thus a diversity of variations is created, meeting almost all requirements in industrial applications.

#### Preferred areas of use are

-  Plant and Machine Engineering
-  Environmental Engineering
-  Energy Industry
-  Mobile Hydraulics




Input pressure range												
Nominal pressure gauge	[bar]	-1...0	0.10	0.16	0.25	0.40	0.60	1	1.6	2.5	4	6
Nominal pressure abs.	[bar]	-	-	-	-	0.40	0.60	1	1.6	2.5	4	6
Overpressure	[bar]	5	0.5	1	1	2	5	5	10	10	20	40
Burst pressure ≥	[bar]	7.5	1.5	1.5	1.5	3	7.5	7.5	15	15	25	50
Nominal pressure gauge / abs.	[bar]	10	16	25	40	60	100	160	250	400	600	
Overpressure	[bar]	40	80	80	105	210	600	600	1000	1000	1000	
Burst pressure ≥	[bar]	50	120	120	210	420	1000	1000	1250	1250	1800	
Vacuum resistance		P <sub>N</sub> ≥ 1 bar: unlimited vacuum resistance P <sub>N</sub> < 1 bar: on request										
Output signal / Supply												
Standard		2-wire: 4 ... 20 mA / V <sub>S</sub> = 8 ... 32 V <sub>DC</sub>										
Option IS-protection		2-wire: 4 ... 20 mA / V <sub>S</sub> = 10 ... 28 V <sub>DC</sub>										
Options 3-wire		3-wire: 0 ... 20 mA / V <sub>S</sub> = 14 ... 30 V <sub>DC</sub> 0 ... 10 V / V <sub>S</sub> = 14 ... 30 V <sub>DC</sub>										
Performance												
Accuracy <sup>1</sup>		standard: ≤ ± 0.25 % FSO option 1: ≤ ± 0.1 % FSO										
Permissible load		current 2-wire: R <sub>max</sub> = [(V <sub>S</sub> - V <sub>S</sub> min) / 0.02 A] Ω current 3-wire: R <sub>max</sub> = 500 Ω voltage 3-wire: R <sub>min</sub> = 10 kΩ										
Influence effects		supply: 0.05 % FSO / 10 V load: 0.05 % FSO / kΩ										
Long term stability		≤ ± 0.1 % FSO / year at reference conditions										
Response time		2-wire: ≤ 10 msec 3-wire: ≤ 3 msec										
<sup>1</sup> accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)												
Thermal effects (Offset and Span)												
Tolerance band		≤ ± 0.75 % FSO										
in compensated range		-20 ... 85 °C										
Permissible temperatures												
Permissible temperatures		medium: -40 ... 125 °C electronics / environment: -40 ... 85 °C storage: -40 ... 100 °C										
Electrical protection												
Short-circuit protection		permanent										
Reverse polarity protection		no damage, but also no function										
Electromagnetic compatibility		emission and immunity according to EN 61326										
Mechanical stability												
Vibration		10 g RMS (25 ... 2000 Hz) according to DIN EN 60068-2-6										
Shock		100 g / 11 msec according to DIN EN 60068-2-27										
Materials												
Pressure port		stainless steel 1.4404 (316 L)										
Housing		stainless steel 1.4404 (316 L)										
Option compact field housing		stainless steel 1.4305 (303), cable gland brass, nickel plated others on request										
Seals (media wetted)		standard: FKM options: EPDM (for P <sub>N</sub> ≤ 160 bar) welded version <sup>2</sup> others on request										
Diaphragm		stainless steel 1.4435 (316 L)										
Media wetted parts		pressure port, seals, diaphragm										
<sup>2</sup> welded version only with pressure ports according to EN 837, P <sub>N</sub> ≤ 40 bar												
Explosion protection (only for 4 ... 20 mA / 2-wire)												
Approvals DX19-DMP 321		IBExU 10 ATEX 1068 X zone 0: II 1G Ex ia IIC T4 Ga zone 20: II 1D Ex ia IIIC T 85°C Da										
Safety technical maximum values		U <sub>i</sub> = 28 V <sub>DC</sub> , I <sub>i</sub> = 93 mA, P <sub>i</sub> = 660 mW, C <sub>i</sub> ≈ 0 nF, L <sub>i</sub> ≈ 0 μH, the supply connections have an inner capacity of max. 27 nF to the housing										
Ambient temperature range		in zone 0: -20 ... 60 °C with p <sub>atm</sub> 0.8 bar up to 1.1 bar in zone 1 or higher: -20 ... 70 °C										
Connecting cables (by factory)		cable capacitance: signal line/shield also signal line/signal line: 160 pF/m cable inductance: signal line/shield also signal line/signal line: 1 μH/m										

Miscellaneous	
Current consumption	signal output current: max. 25 mA signal output voltage: max. 7 mA
Weight	approx. 140 g
Installation position	any <sup>3</sup>
Operational life	> 100 x 10 <sup>6</sup> pressure cycles
CE-conformity	EMC Directive: 2004/108/EC Pressure Equipment Directive: 97/23/EC (module A) <sup>4</sup>
ATEX Directive	94/4/EG

<sup>3</sup> Pressure transmitters are calibrated in a vertical position with the pressure connection down.

<sup>4</sup> This directive is only valid for devices with maximum permissible overpressure > 200 bar

### Wiring diagrams

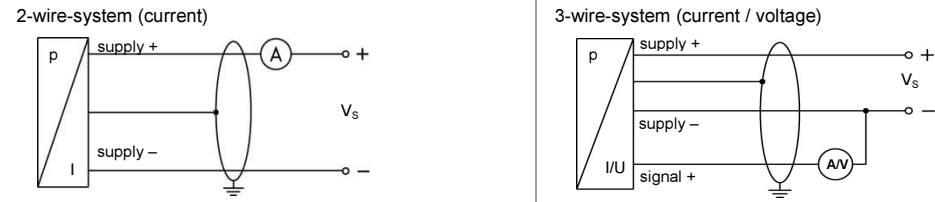


### Pin configuration

Electrical connection	ISO 4400	Binder 723 (5-pin)	M12x1 / metal (4-pin)	field housing	cable colours (DIN 47100)
Supply +	1	3	1	IN +	wh (white)
Supply -	2	4	2	IN -	bn (brown)
Signal + (only for 3-wire)	3	1	3	OUT +	gn (green)
Shield	ground pin	5	4	⊥	ye/gn (yellow / green)


### Electrical connections (dimensions in mm)

#### standard




ISO 4400 (IP 65)


#### option




Binder Series 723 5-pin (IP 67)




M12x1 4-pin (IP 67)

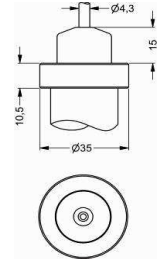

cable outlet with PVC cable (IP 67)<sup>5</sup>



compact field housing (IP 67)

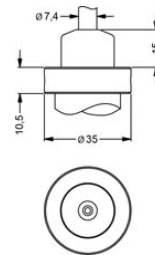

cable outlet, cable with ventilation tube (IP 68)<sup>6</sup>


⇒ universal field housing stainless steel 1.4404 (316 L) with cable gland M20x1.5 (ordering code 880) and other versions on request

<sup>5</sup> standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70 °C)

<sup>6</sup> different cable types and lengths available, permissible temperature depends on kind of cable


**Mechanical connections (dimensions in mm)**

**standard**

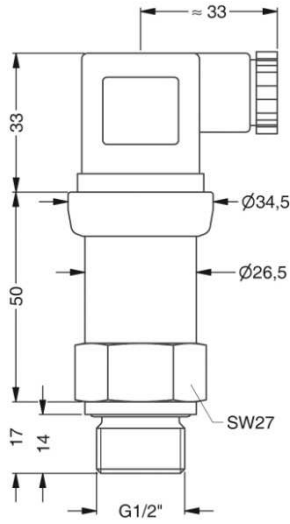


1/2" DIN 3852  
with ISO 4400


**option**




G1/2" EN 837




G1/2" open port




G1/2" DIN 3852  
with flush sensor




G1/4" DIN 3852



G1/4" EN 837



1/2" NPT



1/4" NPT

⇒ metric threads and other versions on request

This data sheet contains product specification, properties are not guaranteed. Subject to change without notice.