



DL01

Battery Powered Precision Digital Gauge for Leak Testing

Stainless Steel Sensor

class 0.05

Nominal pressure

from 0 ... 100 mbar up to 0 ... 400 bar

Special characteristics

- ▶ modular sensor concept
- ▶ data logger
- ▶ graphic display
- ▶ stainless steel housing Ø 100 mm
- ▶ communication interface USB 2.0

Optional

- ▶ accredited calibration certificate acc. to DKD / DAkkS
- ▶ IS-version zone 1
- ▶ software incl. USB converter
- ▶ service case with various accessories

Functions

- ▶ data logger interval
1s ... 99 days or fixed time
- ▶ default values for time / test duration
- ▶ zero point calibration
- ▶ and much more

The digital pressure gauge DL01 is a precision device fulfilling highest demands. It was conceived especially for leak testing or pipeline monitoring. The advantage of the DL01 is that it consists of two devices - the digital display and the pressure transmitter –which can be combined without any tools.

The DL01 can be adapted to several mounting situations quickly and without any problems within seconds without the need to store a variety of digital gauges.

Outstanding measuring qualities, an intuitive operation, as well as an integrated data logger characterize the DL01. In addition, the graphic display provides the handling and the clear presentation of the measuring procedure.

The gathered data and the relevant information (TAG or serial number, etc.) are recorded and can be read out and processed over the integrated interface via USB and PC software.

Preferred areas of use are



Plant and Machine Engineering



- Leak testing
- Pipeline monitoring










Input pressure												
Nominal pressure gauge	[bar]	-1...0	0.10	0.16	0.25	0.40	0.60	1	1.6	2.5	4	6
Nominal pressure abs.	[bar]	-	-	-	-	0.40	0.60	1	1.6	2.5	4	6
Overpressure	[bar]	5	1	1	1	2	5	5	10	10	17.5	35
Burst pressure \geq	[bar]	7.5	1.5	1.5	1.5	3	7.5	7.5	15	15	25	50
Nominal pressure gauge / abs.	[bar]	10	16	25	40	60	100	160	250	400		
Overpressure	[bar]	35	80	80	105	210	600	600	1000	1000		
Burst pressure \geq	[bar]	50	120	120	210	420	1000	1000	1250	1250		
Vacuum resistance		P _N \geq 1 bar: unlimited vacuum resistance; P _N < 1 bar: on request										
Performance												
Accuracy ¹		standard for P _N \geq 0.4 bar: $\leq \pm 0.05$ % BFSL standard for P _N < 0.4 bar: $\leq \pm 0.125$ % BFSL										
Long term stability		$\leq \pm 0.1$ % FSO / year at reference conditions										
Measuring rate / Display		1 or 2 measurements per second										
¹ accuracy according to IEC 60770 – minimum value setting (non-linearity, hysteresis, repeatability)												
Thermal effects (Offset and Span)												
Temperature error		for nominal pressure ranges P _N \leq 160 bar: included in the accuracy information for nominal pressure ranges P _N > 160 bar: tolerance band $\leq \pm 0.75$ % FSO (is valid for compensated range 0 ... 50 °C)										
Permissible temperatures												
Permissible temperatures		medium: -10 ... 55 °C environment: -10 ... 55 °C storage: -20 ... 70 °C										
Materials												
Pressure port / housing		stainless steel 1.4404 (316L)										
Display housing		stainless steel 1.4301 (304)										
Seals (media wetted)		FKM										
Diaphragm		Stainless steel 1.4435 (316L)										
Media wetted parts		pressure port, seal, diaphragm										
Explosion protection												
AX16-DM01 (in preparation)		IBExU12ATEX1108 X zone 1: II 2G Ex ia IIC T4 Gb										
Miscellaneous												
Display		graphic LC display: visible area 55 x 46 mm; (resolution 128x64) figure height 5.5 mm (displaying of pressure value) measured value display: max. 7 digits, depending on pressure range temperature display, time, 100-segment-bargraph, potential input value background illumination: illumination period and intensity adjustable										
Temperature display range		accuracy: ± 2 K resolution: 0,1 K display: -10 ... 55 °C										
adjustable units		[bar], [mbar], [psi], [inHg], [cmHg], [mmHg], [hPa], [kPa], [Mpa], [mH ₂ O], [mmH ₂ O], [inH ₂ O], [kg/cm ²]										
Data logger		Recording of pressure values and sensor temperature (min, hrs, daily at a defined time) max. 8500 values mode: linear measuring value interval adjustable										
Current consumption		without background illumination: approx. 1.3 mA with background illumination: approx. 16 mA (depending on adjusted intensity) standby mode: approx. 1.2 μ A										
Supply		3x 1.5 V: Duracell Plus battery, DUR087033, AA (LR6)										
Ingress protection		IP 67										
Mounting position ²		any										
Weight		approx. 680 g										
A / D-converter resolution		16 bit										
Battery life		standard use: > 2.000 h standby mode: at least 5 years										
Load cycles		> 100 x 10 ⁶										
CE-conformity		EMC directive: 2004/108/EC pressure equipment directive: 97/23/EC (Module A) ³ electromagnetic compatibility: according to EN 61326										
² Pressure transmitters are calibrated in a vertical position with the pressure connection down. If this position is changed on installation there can be slight deviations in the zero point for pressure ranges P _N \leq 1 bar.												
³ This directive is only valid for devices with maximum permissible overpressure > 200 bar.												

Dimensions (in mm)

standard

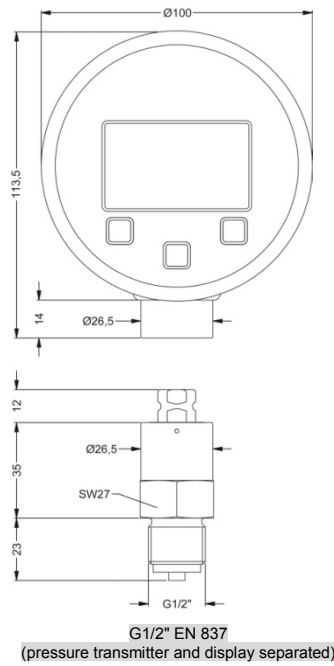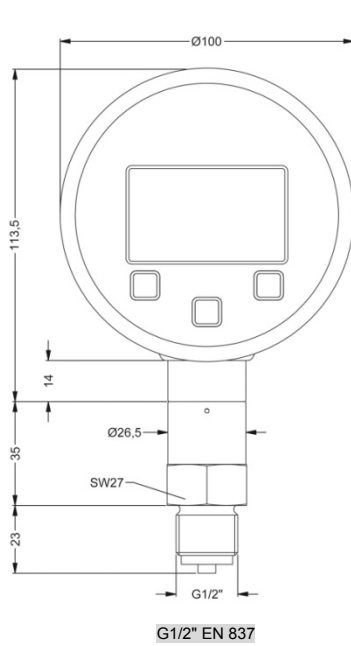

option

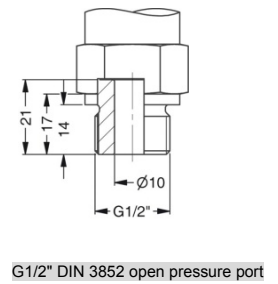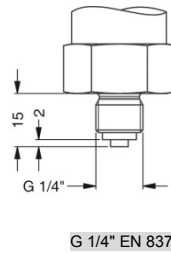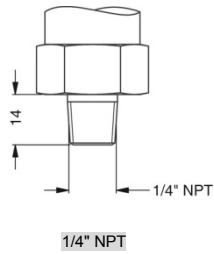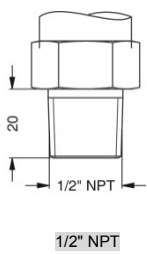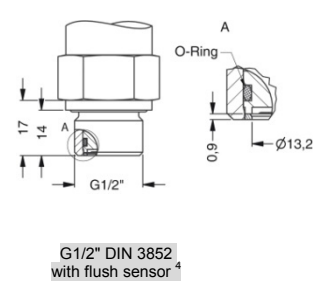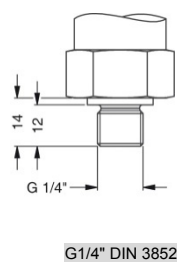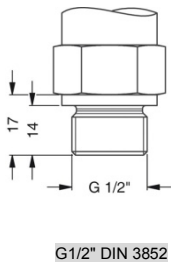

⇒ metrical threads and other variations on request

⁴ only possible for nominal pressure ranges $P_N \leq 40$ bar


Accessories are not in scope of supply and have to be ordered separately!

BD|LOG software

Optionally the software BD|LOG and an interface cable can be ordered. The software is also available for download on our homepage.

Software:

- display of device information (serial number, pressure and temperature range,...)
- configuration area for all parameters
- download area for recorded data:
 - date
 - pressure value
 - temperature value
- actual value

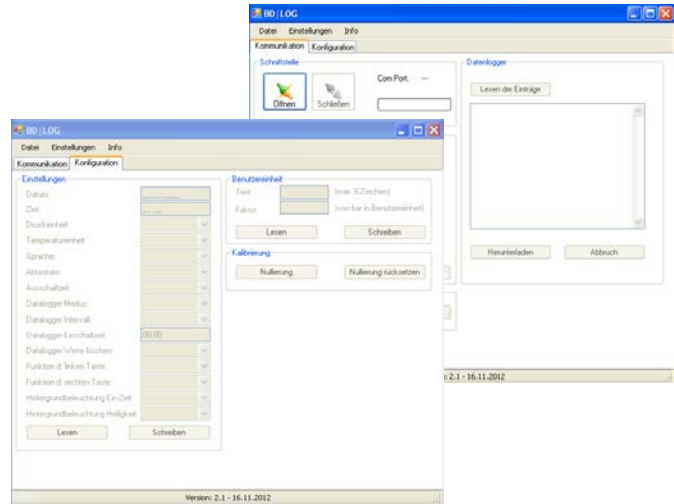

Interface cable with
integrated USB converter
l: 1.7 m

Ordering number: ZUSBCD02

<p>Hard-shell service case without accessories</p> <p>Service_Case_DM01</p>		<p>Hard shell case.</p> <p>Dimension in mm (L x W x H): 432 X 363 X 138</p>
<p>Protective cap</p> <p>Ordering number: Z1002648</p>		<p>Rubber protection</p>
<p>Additional batteries (only in combination with service case)</p>		<p>for IS-version use only</p> <ul style="list-style-type: none"> 3 x 1.5 V / AA Duracell Power Plus
<p>Seal set (only in combination with service case)</p>		<p>Flat seal copper for mechanical connections according to EN 837</p>
<p>PTFE seal tape Nr. 498.505 (only in combination with service case)</p>		<p>Seal tape for mechanical connections material: PTFE (Teflon) Temperature range: -200 ... 280 °C</p>
<p>Wrench (only in combination with service case)</p>		<p>Wrench SW 27</p>
<p>Calibration test pump KHP 35</p> <p>Ordering number: 1002637</p>		<p>The KHP 35 calibration test pump is used to generate pressure and vacuum for checking, adjusting and calibrating mechanical and electronic pressure measuring instruments by comparative measurements. These pressure tests may be carried out in laboratories, workshop or on site at the measuring point.</p> <p>pressure: 0 ... 35 bar vacuum: 0 ... -0,95 bar weight: ca. 510 g dimension: ca. 220 x 105 x 63 mm</p>
<p>Adapter for calibration test pump</p>		
<p>Test unit connection:</p> <p>Adapter to connect the test unit to the calibration test pump.</p>		<p>Adapter to connect the test unit to the calibration test pump.</p> <p>external thread: G 1/4" EN 837</p> <p>to:</p> <p>internal thread: G 1/4" DIN 3852 (No. 5008909) or G 1/2" EN o. DIN (No. 5007896) or 1/4" NPT (No. 5007897) or 1/2" NPT (No. 5007898)</p> <p>others on request</p>
<p>Reference unit connection:</p> <p>Adapter to connect the digital gauge to the calibration test pump</p>		<p>Adapter to connect the pressure sensor module DM01 to the calibration test pump.</p> <p>external thread: G 1/2" EN 837</p> <p>to:</p> <p>internal thread: G 1/4" DIN 3852 (No. 5012498) or G 1/2" DIN 3852 (No. 5012519) or 1/4" NPT (No. 5012499) or 1/2" NPT (No. 5012500)</p> <p>others on request</p>

Ordering code DL01

2. position: digital display for Precision Digital Pressure Gauge DL01

DL01-

--	--	--

Digital pressure gauge DL01	A 2 1
with communication interface	A 2 E
IS with communication interface	

2. position: transmitter for Precision Digital Pressure Gauge DL01

DL01

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Pressure									
	gauge								
	absolute	1	M	0	P				
Input	[bar]	1	M	0	Q				
	0.10	1	1	0	0	0			
	0.16	1	1	6	0	0			
	0.25	1	2	5	0	0			
	0.40		4	0	0	0			
	0.60		6	0	0	0			
	1.0		1	0	0	1			
	1.6		1	6	0	1			
	2.5		2	5	0	1			
	4.0		4	0	0	1			
	6.0		6	0	0	1			
	10		1	0	0	2			
	16		1	6	0	2			
	25		2	5	0	2			
	40		4	0	0	2			
	60		6	0	0	2			
	100		1	0	0	3			
	160		1	6	0	3			
	250		2	5	0	3			
	400		4	0	0	3			
	-1 ... 0		X	1	0	2			
version	customer		9	9	9	9			
	non IS		0						
	IS		E						
Accuracy									
standard for $P_N \geq 0.4$ bar	0.05%		B	1					
standard for $P_N < 0.4$ bar	0.125%		B	2					
customer			9	9					
Mechanical connection									
	G1/2" DIN 3852		1	0	0				
	G1/2" EN 837		2	0	0				
	G1/4" DIN 3852		3	0	0				
	G1/4" EN 837		4	0	0				
	G1/2" DIN 3852		F	0	0				
	with flush sensor ²								
	G1/2" DIN 3852 open pressure port		H	0	0				
	1/2" NPT		N	0	0				
	1/4" NPT		N	4	0				
	customer		9	9	9				
Seals									
	FKM		1						
	customer		9						
Special version									
	standard		0	0	0				
	customer		9	9	9				

¹ absolute pressure possible from 0.4 bar

² only possible for $P_N \leq 40$ bar

ordering example:

device DL01:

position 1: DL 01-A21

position 2: MOP-1001-B1-200-1-000

only display: position 1: DL01-A21

only transmitter: position 2: MOP-1001-B1-200-1-000

Accessories DL01

Accessories	
USB converter (incl. software BD LOG)	ZUSBCD02
service case (without accessories)	Service_Case_DM01
Protective cap	Z1002648
Additional batteries (3 x 1,5 V / AA Duracell Power Plus) ⁴	1002798
Seal set ⁴	5008886
PTFE seal tape ⁴	1002724
wrench ⁴	1002722
Calibration test pump (KHP)	1002637
Adapter for KHP - test unit connection	
G1/4" EN 837 m - G1/4" DIN3852 fm	5008909
G1/4" EN 837 m - G1/2" EN 837/DIN3852 fm	5007896
G1/4" EN 837 m - 1/4" NPT fm	5007897
G1/4" EN 837 m - 1/2" NPT fm	5007898
Adapter for KHP - reference unit connection	
G1/2" EN 837 m - G1/4" DIN3852 fm	5012498
G1/2" EN 837 m - G1/2" DIN3852 fm	5012519
G1/2" EN 837 m - 1/4" NPT fm	5012499
G1/2" EN 837 m - 1/2" NPT fm	5012500

⁴ only in combination with service case

19.12.2014

© 2014 BD|SENSORS GmbH - The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.